

6008 Blower Series

Dimensions: 70X68.2X08 mm

Bearing Type: FDB,Hydraulic

Function Type: FG/RD Signal,PWM pulse


Protection: Auto Restart Protection or General Options




SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH ₂ O	INH ₂ O	(dBA)	
6008RVL-N (P/M) 5	5	0.20	1.00	2000	0.075	2.63	3.21	0.126	14.8	L
6008RVM-N (P/M) 5	5	0.35	1.75	2500	0.091	3.20	4.80	0.189	18.4	M
6008RVH-N (P/M) 5	5	0.65	3.25	3500	0.131	4.61	11.12	0.438	28.6	H
6008RVL-N (P/M) 1	12	0.12	1.44	2000	0.075	2.63	3.21	0.126	14.8	L
6008RVM-N (P/M) 1	12	0.25	3.00	2500	0.091	3.20	4.80	0.189	18.4	M
6008RVH-N (P/M) 1	12	0.40	4.80	3500	0.131	4.61	11.12	0.438	28.6	H

PERFORMANCE CURVES

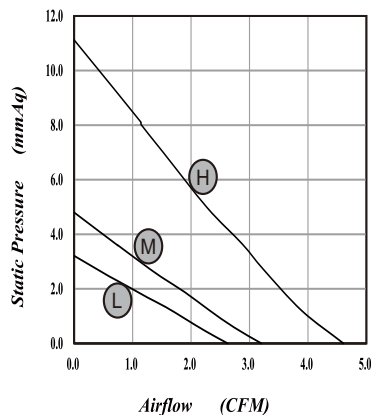

DIMENSIONS DRAWING

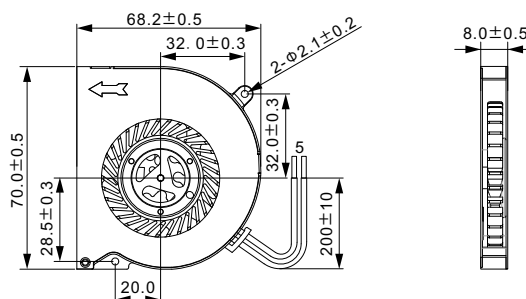

*Specifications are subject to change without notice